

RELIEF PRESSURE ADJUSTMENT RANGE: 0 TO 150 PSI
RELIEF PRESSURE FACTORY SETTING: 50 PSI

WETTED MATERIALS:

BODY: PVC

DIAPHRAGM: TEFLON (WETTED)/EPDM (NON-WETTED)

NON-WETTED MATERIALS:

SPRING CASE: PVC

RELIEF PRESSURE ADJUSTING SCREW: PVC


SPRING: ZINC PLATED SPRING STEEL

NUTS, BOLTS & WASHERS: 18-8 STAINLESS STEEL

MODEL NUMBER:

KBPV-T-10-P-P-TE (THREADED CONNECTIONS)

KBPV-S-10-P-P-TE (SOCKET WELD CONNECTIONS)

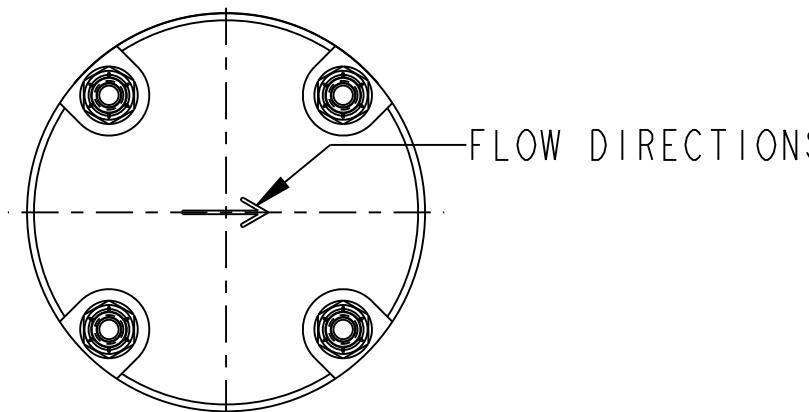

B	5/20/15	LR	REVISED TO SHOW CHANGE TO LABEL	DIM'S IN INCHES	KENCO	MATERIAL: SEE B/M
A	5/04/15	BRC	RELEASED	TOLERANCES UNLESS OTHERWISE SPECIFIED.	ENGINEERING	RELEASE LEVEL: RELEASED
REV.	DATE	DRN.	DESCRIPTION	ANGULAR $\pm 1/2^\circ$	Tulsa, Oklahoma USA	DRAWING CREATED IN PRO/ENGINEER
	ECN	CHKD.		FRACTIONAL $\pm 1/64"$ (X.X) $\pm 0.015"$ (X.XX) $\pm 0.010"$ (X.XXX) $\pm 0.005"$		
			PROPRIETARY: THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS PROPRIETARY TO KENCO ENGINEERING CO. AND SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE OR FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN PERMISSION OF KENCO ENGINEERING.	MACH FILLET RAD. .031" 125 MAX. FINISH. ALL MACHINED SURFACES.		
				DRN. BY: BRC	SCALE: 0.600	DRAWING NUMBER
				CHKD. BY: KLM	REVISION: B	
				DATE: 5/04/15	SHEET 1 OF 3	73460