

We are a proud member of Accudyne Industries, a leading global provider of precision-engineered, process-critical, and technologically advanced flow control systems and industrial compressors. Delivering consistently high levels of performance, we enable customers in the most important industries and harshest environments around the world to accomplish their missions.

**Accudyne**  
INDUSTRIES

To discover why the WILLIAMS SCIP Series of Solar-Powered Pumps are the best pumps under the sun, contact your local representative or visit our website at: [williamspumps.com](http://williamspumps.com)



Stand Alone Systems for  
use with your existing tank



Fully Self-Contained  
Packages protected  
from the elements

# The Best Solar-Powered Metering Pumps Under The Sun



**WILLIAMS**  
**Solar Chemical Injection Pump**



201 Ivyland Road  
Ivyland, PA 18974, USA  
Tel: (215) 441-0800  
Fax: (215) 441-8620

[info@williamspumps.com](mailto:info@williamspumps.com)  
[www.williamspumps.com](http://www.williamspumps.com)

 **WILLIAMS**  
CHEMICAL METERING PUMPS  
*an Accudyne Industries brand*

WILLIAMS Solar SCIP is a registered trademark of Milton Roy, LLC.

WILLIAMS SCIP • 10/16

 **WILLIAMS**  
CHEMICAL METERING PUMPS  
*an Accudyne Industries brand*

# The Best Solar-Powered Metering Pump Under The Sun

Wouldn't it be great if you could install a pump that would last forever?

That's why we designed the WILLIAMS SCIP Series of Solar-Powered Chemical Injection Pumps. You can set it and forget it. The WILLIAMS SCIP Series of pumps will keep working day and night, even in the most remote locations and harshest environments, driven by power provided by the sun. No costly shut-downs. No loss of production. Just continuous pumping.

**Better Performance** - Simple installation, innovative design features and robust construction provides trouble-free performance.

**Better Value** - The superior dual-seal design provides a longer pump life requiring less maintenance, reduced operating costs and no seal packing to adjust.

**Best Reliability** - From a company with over 75 years of metering pump expertise, the WILLIAMS SCIP metering pump is designed and built to perform consistently with the results you expect every day.




## WILLIAMS SCIP Series of Solar-Powered Pumps design features:

- Single-stage reduction, spur gears and integral cam
- Three (3) cam sizes (stroke length): 0.30 in., 0.45 in., 0.60 in.
- Dual-seal proven design
- No packing to adjust
- Simplex and duplex heads
- Explosion-proof (optional)
- Plunger sizes (pressure capability): 1/4 in. (5,000 psi), 3/8 in. (2,500 psi)
- Oil bath gear lubrication- to help ensure long life
- Self-contained (quick-change) 316 stainless steel liquid end design
- Plunger materials: 17-4ph stainless (standard)
- Ceramic (optional)
- Guided crosshead and seal
- 12 VDC power
- UL/CSA approvals


## Engineered to last

WILLIAMS SCIP pumps are designed with innovative features to deliver the ultimate in solar-powered performance.

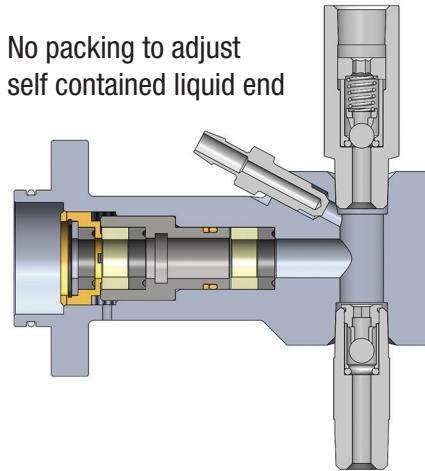

### Motor Specifications

- Permanent magnet motor (replaceable brushes)
- Voltage range: 12VDC
- HP rating: 1/16 hp
- Agency approvals: UL, CSA

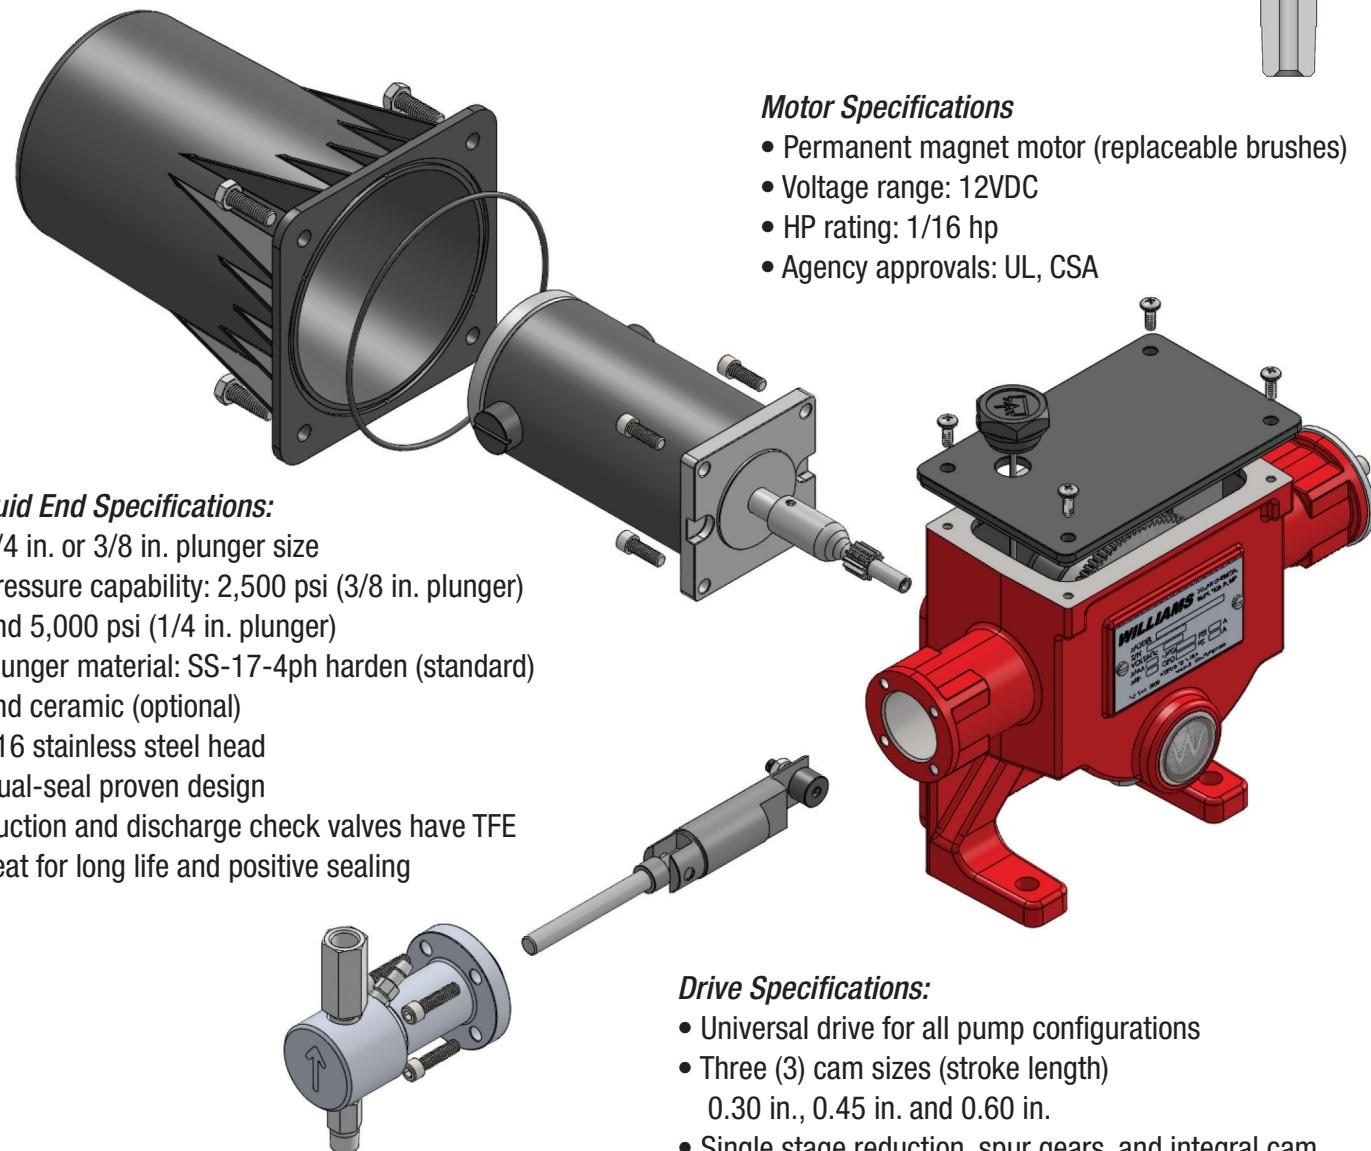

### Liquid End Specifications:

- 1/4 in. or 3/8 in. plunger size
- Pressure capability: 2,500 psi (3/8 in. plunger) and 5,000 psi (1/4 in. plunger)
- Plunger material: SS-17-4ph harden (standard) and ceramic (optional)
- 316 stainless steel head
- Dual-seal proven design
- Suction and discharge check valves have TFE seat for long life and positive sealing

### Drive Specifications:

- Universal drive for all pump configurations
- Three (3) cam sizes (stroke length) 0.30 in., 0.45 in. and 0.60 in.
- Single stage reduction, spur gears, and integral cam
- Designed specifically for the WILLIAMS SCIP pump

FLOW (GPD)	PLUNGER	STROKE	PRESSURE (PSI)*												
			100	250	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000
	0.250	0.300	13.8	13.7	13.5	13.3	13.1	12.8	12.4	12.0	11.6	11.2	10.9	10.5	10.1
	0.250	0.450	20.6	20.4	20.0	19.6	19.2	18.4	17.6	16.8	16.0	15.2			
	0.375	0.300	31.0	30.6	29.9	29.2	28.5	27.2	25.8	24.5					
	0.375	0.450	48.2	47.4	46.0	44.6	43.3	40.5							
	0.375	0.600	64.3	62.9	60.6	58.3	56.0								

\*Based on Simplex Pump performance. For Duplex Pump performance, double the volume (gpd).